

## ToLEDo LYNX S

ToLEDo Lynx S 660LM G23 840 SL

0030221



### Product features

- LED replacement for compact fluorescent Lynx-S lamps
- 30,000 hours average rated life (L70 F50)
- 3 years warranty
- Quick, simple and safe replacement without rewiring
- Direct retrofit - easiest way to upgrade existing luminaires to LED technology
- Suitable for magnetic ballast/CCG and direct mains 220-240V AC operation
- Low energy consumption and no flickering
- Compact and durable construction
- Minimum and maximum operating temperature: -20°C to 45°C
- Ideal for commercial and residential applications including offices, hotels, restaurants, warehouses, supermarkets, corridors, in addition to living rooms, kitchens and garages
- Warning: ToLEDo Lynx S lamps are not suitable for operation with electronic ballast/ECG operation.



### PRODUCT OVERVIEW

Product name	ToLEDo Lynx S 660LM G23 840 SL
Technology	LED
Lamp shape	U shape
Type	LED exchangeable
Cap/Base	G23

## ToLEDo LYNX S

ToLEDo Lynx S 660LM G23 840 SL

0030221

Lamp finish	Opal
General application	Hospitality, Logistics & Industry, Residential & Consumer
ETIM Class	EC001959
E-number FI	4941326
Warranty	3 years
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	130
Photobiological Risk Group	RG0
Wattage (W)	6
Dimmable	No
IP rating	IP20
Product EAN number	5410288302218

### DATA TABLE

#### General data

Product name	ToLEDo Lynx S 660LM G23 840 SL
Technology	LED
Lamp shape	U shape
Type	LED exchangeable
Cap/Base	G23
Lamp finish	Opal
General application	Hospitality, Logistics & Industry, Residential & Consumer
Operating temperature range (°C)	-20°C...+45°C
ETIM Class	EC001959
E-number FI	4941326
Warranty	3 years

#### Optical data

Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	130
Photobiological Risk Group	RG0

#### Electrical data

Wattage (W)	6
Equivalent watt (W)	11
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
Dimmable	No
Inrush Current (A)	5
Inrush Duration (µs)	100

## ToLEDo LYNX S

ToLEDo Lynx S 660LM G23 840 SL

0030221

Lamp Energy Label (class)	E
---------------------------	---

### Lifetime data

Lifespan L70 B50	30000
------------------	-------

### Physical data

IP rating	IP20
Nominal Product Length (mm)	233
Nominal Product Width (mm)	32
Nominal Product Height (mm)	21
Weight (kg)	0.05


### Packaging

Single packaging type	Carton
Product EAN number	5410288302218
Packaging single length / height (cm)	4.6
Packaging single width (cm)	2.0
Packaging single depth (cm)	24.7
DUN14 (outer)	15410288302215
Units per outer package	6
Packaging outer length / height (cm)	10.5
Packaging outer width (cm)	7.2
Packaging outer depth (cm)	28.7

### Safety data


Optimal operating condition (°C)	-20-45
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	Yes
Safety message	Not suitable for household

## PHOTOMETRY

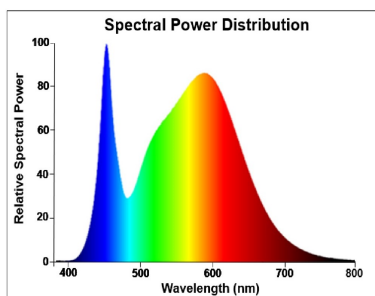


ToLEDo LYNX S  
*ToLEDo Lynx S 660LM G23 840 SL*  
0030221

## TECHNICAL DRAWINGS



0030221

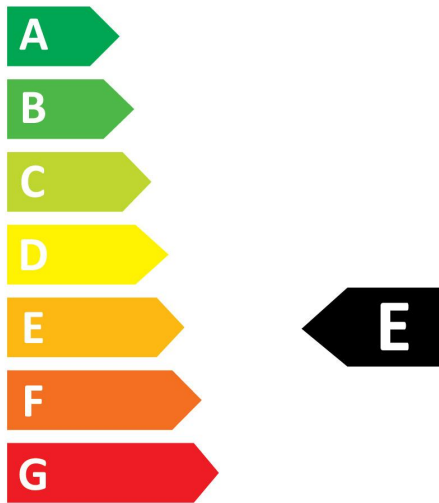

**6**  
kWh/1000h



2019/2015

# SYLVANIA

ToLEDo LYNX S

ToLEDo Lynx S 660LM G23 840 SL

0030221



0030221



**6**  
kWh/1000h



2019/2015